


DAF 079

TRUCIOLATORE COMPATTO A SPOGLIA VARIABILE

Compact hogger with variable clearance angle
Kompakt Zerspaner mit variable Spanwinkel
Triturador compacto con ángulo
de inclinación variable

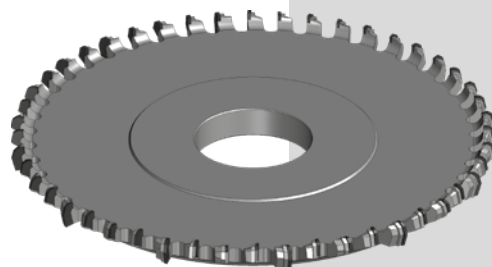

INFORMAZIONI TECNICHE TECHNICAL INFORMATION TECHNISCHE INFORMATIONEN INFORMACIONES TÉCNICAS

Riaffilabile 7 - 10 volte
Resharpener 7 - 10 times
Nachschärfbar 7 - 10 Male
Reafilables 7 - 10 veces

n° di giri RPM 5.000 - 6.000
No. of revs RPM 5.000 - 6.000
Drehzahl RPM 5.000 - 6.000
n° de vueltas RPM 5.000 - 6.000

Avanzamento 30 - 40 m
Feed rate 30 - 40 m
Vorschub 30 - 40 m
Velocidad de avance 30 - 40 m

APPLICAZIONI APPLICATIONS ANWENDUNGEN APLICACIONES

Ottima finitura
Good finishing
Optimale Feinarbeitung
Excelente acabado

Adatto a medi e grandi lotti
Useful for medium and large batches
Geeignet für mittlere und große Partie
Perfecto para lotes medianos y grandes

MACCHINE MACHINES MASCHINEN MÁQUINAS

Squadatrici
Squaring machines
Formatkreissägen
Escuadradoras

MATERIALI LAVORABILI WORKPIECE MATERIALS VERARBEITBARE MATERIALIEN MATERIALES PROCESABLES



Truciolare
Chipboard
Spanplatte
Aglomerado

MDF

Laminati
Laminated
Laminat
Laminados

Materiale abrasivi
Abrasive materials
Schleifmaterialien
Materiales abrasivos

Legni tropicali
Tropical woods
Tropenhölzer
Maderas tropicales

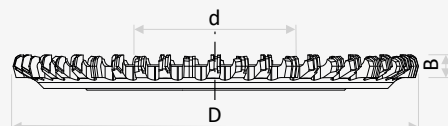

H5

CODICE DX RH CODE	CODICE SX LH CODE	D mm	B mm	d mm	FORATURA PIN HOLES	Z	PLACCHE - TIPS n°
DAF07901	DAF07902	250	13,8	60	160 S-SYSTEM	24+12+12	48
DAF07903	DAF07904	250	13,8	60	160 S-SYSTEM	36+18+18	72
DAF07905	DAF07906	250	13,8	80	192 S-SYSTEM	24+12+12	48
DAF07907	DAF07908	250	13,8	80	192 S-SYSTEM	36+18+18	72
DAF07909	DAF07910	250	13,8	80	4/9/100	24+12+12	48
DAF07911	DAF07912	250	13,8	80	4/9/100	36+18+18	72