


DAF 266

FRESA NESTING PER MATERIALI COMPATTI

Nesting cutter for compact materials
Nestingfräser für kompakte Materialien
Fresa Nesting para materiales compactos

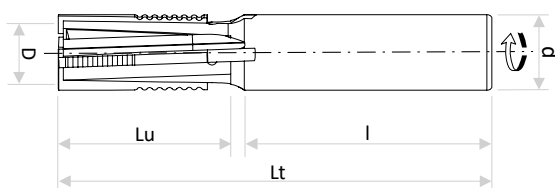

INFORMAZIONI TECNICHE TECHNICAL INFORMATION TECHNISCHE INFORMATIONEN INFORMACIONES TÉCNICAS

Riaffilabile 2-3 volte
Resharpener 2-3 times
Nachschärfbar 2-3 Male
Reafilable 2-3 veces

n° di giri RPM 24.000
No. of reps RPM 24.000
Drehzahl RPM 24.000
n° de vueltas RPM 24.000

Avanzamento 6-8 m
Feed rate 6-8 m
Vorschub 6-8 m
Velocidad de avance 6-8 m

MACCHINE MACHINES MASCHINEN MÁQUINAS

CNC
Punto - Punto
CNC Machines

Pantografi
Pantographs
Pantographen
Pantógrafos

Macchine speciali con inserimento
ad attacco cilindrico
Special machines with cylindrical shank
Sondermaschinen für Schaftfräser
Máquinas especiales con inserción
de mango cilíndrico

APPLICAZIONI APPLICATIONS ANWENDUNGEN APLICACIONES

Foratura
Drilling
Bohren
Taladrar

Contornatura
Contouring
Rahmenfräsen
Contornar

Scanalatura
Grooving
Nuten
Acanaladura

Ottima finitura su entrambi i lati
(sopra e sotto)
Excellent finish on both sides
(top and bottom)
Optimale Verarbeitung auf beiden Seiten
(oben und unten)
Excelente acabado en ambos lados
(superior e inferior)

Adatto a medi e grandi lotti
Useful for medium and large batches
Geeignet für mittlere und große Partie
Perfecto para lotes medianos y grandes

MATERIALI LAVORABILI WORKPIECE MATERIALS VERARBEITBARE MATERIALIEN MATERIALES PROCESABLES

MDF


Trespa

Corian

HPL

Pannelli in fibra di carbonio
Carbon fibre boards
Kohlefaserplatten
Paneles de fibra de carbono

Materiali abrasivi
Abrasive Materials
Schleifmaterialien
Materiales abrasivos



Fresa con rompitruciolo per forte asportazione

Cutter with chip breaker for high material removal
Fräser mit Spanbrecher für großen Materialabtrag
Fresa con rompeviruta para una elevada remoción

H3_Z2_Z4

CODICE CODE	MATERIALE MATERIAL	D mm	Lu mm	Lt mm	ATTACCO - SHANK d mm l mm	Z	ROTAZ. ROTAT.	PLACCHE - TIPS n° Forante/Drilling Tip
DAF26601	ACCIAIO P.	10	24	75	12 40	2	R	2 DIA
DAF26602	ACCIAIO P.	12	24	70	12 40	4	R	4 DIA
DAF26603	ACCIAIO P.	12	27	72	12 40	4	R	4 DIA
DAF26604	ACCIAIO	16	24	80	16 50	4	R	4 DIA