


DAF 325

FRESA PER SMUSSI A 45°

Chamfering cutter 45°

Schaftfräser für Fasen 45°

Fresa para biseles 45°

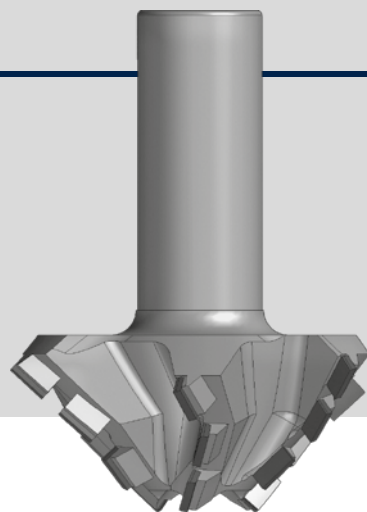

INFORMAZIONI TECNICHE TECHNICAL INFORMATION TECHNISCHE INFORMATIONEN INFORMACIONES TÉCNICAS

Riaffilabile 6-8 volte
Resharpening 6-8 times
Nachschärfbar 6-8 Male
Reafilable 6-8 veces

n° di giri RPM 12.000-14.000
No. of reps RPM 12.000-14.00
Drehzahl RPM 12.000-14.00
n° de vueltas RPM 12.000-14.00

Avanzamento 10-12 m
Feed rate 10-12 m
Vorschub 10-12 m
Velocidad de avance 10-12 m

APPLICAZIONI APPLICATIONS ANWENDUNGEN APLICACIONES

Smussi 45°
Bevellings 45°
Fasen 45°
Biseles 45°

Ottima finitura su entrambi i lati
(sopra e sotto)

Excellent finish on both sides
(top and bottom)

Optimale Verarbeitung auf beiden Seiten
(oben und unten)

Excelente acabado en ambos lados
(superior e inferior)

Adatto a medi e grandi lotti
Useful for medium and large batches
Geeignet für mittlere und große Partie
Perfecto para lotes medianos y grandes

A richiesta si eseguono anche altre misure

Other dimensions available on request
Andere Maße auf Anfrage
Bajo pedido también se realizan otras medidas

MATERIALI LAVORABILI WORKPIECE MATERIALS VERARBEITBARE MATERIALIEN MATERIALES PROCESABLES

MDF

Truciolare
Chipboard
Spanplatte
Aglomerado

Materiale abrasivi
Abrasive Materials
Abrasives Material
Materiales abrasivos

Laminati
Laminated
Laminate
Laminados

Legno
Wood
Holz
Madera


MACCHINE MACHINES MASCHINEN MÁQUINAS

CNC

Punto - Punto

Pantografi
Pantographs
Pantographen
Pantógrafos

Macchine speciali con inserimento
ad attacco cilindrico
Special machines with cylindrical shank
Sondermaschinen für Schaftfräser
Máquinas especiales con inserción
de mango cilíndrico

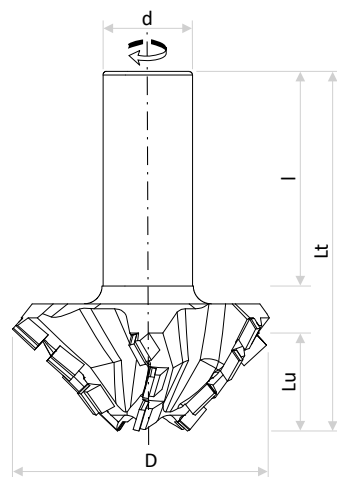

H4_Z3_F6

CODICE CODE	MATERIALE MATERIAL	D mm	Lu mm	Lt mm	ATTACCO - SHANK d mm l mm	Z	ROTAZ. ROTAT.	PLACCHE - TIPS n°
DAF32501	ACCIAIO	80	28	100	25 60	3	R	18