


DAF 331

FRESA PER GUIDE IN ALLUMINIO

Cutter for aluminium guides

Schaftfräser für Alu-Schienenführungen

Fresa para guía de aluminio

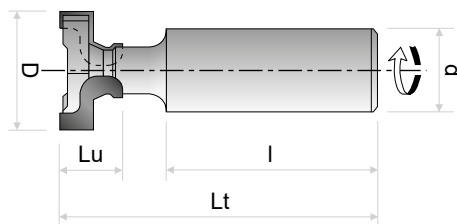

INFORMAZIONI TECNICHE TECHNICAL INFORMATION TECHNISCHE INFORMATIONEN INFORMACIONES TÉCNICAS

Riaffilabile 3-4 volte
Resharpener 3-4 times
Nachschärfbar 3-4 Male
Reafilable 3-4 veces

n° di giri RPM 18.000-20.000
No. of reps RPM 18.000-20.000
Drehzahl RPM 18.000-20.000
n° de vueltas RPM 18.000-20.000

Avanzamento 3-5 m
Feed rate 3-5 m
Vorschub 3-5 m
Velocidad de avance 3-5 m

MACCHINE MACHINES MASCHINEN MÁQUINAS

CNC
Punto - Punto

Pantografi
Pantographs
Pantographen
Pantógrafos

Macchine speciali con inserimento
ad attacco cilindrico
Special machines with cylindrical shank
Sondermaschinen für Schaftfräser
Máquinas especiales con inserción
de mango cilíndrico

APPLICAZIONI APPLICATIONS ANWENDUNGEN APLICACIONES

Scanalatura
Grooving
Nuten
Acanaladura

Ottima finitura su entrambi i lati
(sopra e sotto)
Excellent finish on both sides
(top and bottom)
Optimale Verarbeitung auf beiden Seiten
(oben und unten)
Excelente acabado en ambos lados
(superior e inferior)
Adatto a medi e grandi lotti
Useful for medium and large batches
Geeignet für mittlere und große Partie
Perfecto para lotes medianos y grandes




MATERIALI LAVORABILI WORKPIECE MATERIALS VERARBEITBARE MATERIALIEN MATERIALES PROCESABLES

MDF
Truciolare
Chipboard
Spanplatte
Aglomerado
Materiali abrasivi
Abrasive Materials
Schleifmaterialien
Materiales abrasivos
Laminati
Laminated
Laminat
Laminados
Legno
Wood
Holz
Madera

A richiesta si eseguono anche altre misure

Other dimensions available on request
Andere Maße auf Anfrage
Bajo pedido también se realizan otras medidas



H4

CODICE CODE	D mm	Lu mm	Lt mm	ATTACCO - SHANK d mm	l mm	Z	ROTAZ. ROTAT.	PLACCHE - TIPS n°
DAF33101	27,9	15,2	75	20	50	2	R	2
DAF33102	32,7	16,8	75	20	50	2	R	2
DAF33103	27,3	20	75	20	50	2	R	2
DAF33104	29	20	75	20	50	2	R	2
DAF33105	28	20	75	20	50	2	R	2
DAF33106	25,9	20	75	20	50	2	R	2