


DAF 344

FRESA PER SGROSSATURA

Roughing cutter

Schaftfräser für Schruppen

Fresa de desbaste

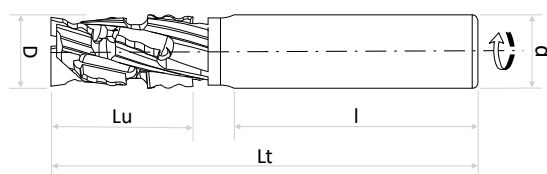


INFORMAZIONI TECNICHE TECHNICAL INFORMATION TECHNISCHE INFORMATIONEN INFORMACIONES TÉCNICAS

Riaffilabile 3-4 volte
Resharpener 3-4 times
Nachschärfbar 3-4 Male
Reafilable 3-4 veces

n° di giri RPM 18.000-20.000
No. of reps RPM 18.000-20.000
Drehzahl RPM 18.000-20.000
n° de vueltas RPM 18.000-20.000

Avanzamento 6-8 mm
Feed rate 6-8 mm
Vorschub 6-8 mm
Velocidad de avance 6-8 mm



Fresa con romptruciolo per forte asportazione

Cutter with chip breaker for high material removal
Fräser mit Spanbrecher für großen Materialabtrag
Fresa con rompeviruta para una elevada remoción

MACCHINE MACHINES MASCHINEN MÁQUINAS

CNC

Punto - Punto

Pantografi
Pantographs
Pantographen
Pantógrafos

Macchine speciali con inserimento
ad attacco cilindrico

Special machines with cylindrical shank

Sondermaschinen für Schaftfräser

Máquinas especiales con inserción
de mango cilíndrico

APPLICAZIONI APPLICATIONS ANWENDUNGEN APLICACIONES

Foratura
Drilling
Bohren
Taladrar

Contornatura
Contouring
Rahmenfräsen
Contornar

Scanatura
Grooving
Nuten
Acanaladura

Ottima finitura su entrambi i lati
(sopra e sotto)

Excellent finish on both sides
(top and bottom)

Optimale Verarbeitung auf beiden Seiten
(oben und unten)

Excelente acabado en ambos lados
(superior e inferior)

Adatto a medi e grandi lotti
Useful for medium and large batches
Geeignet für mittlere und große Partie
Perfecto para lotes medianos y grandes

MATERIALI LAVORABILI WORKPIECE MATERIALS VERARBEITBARE MATERIALIEN MATERIALES PROCESABLES

MDF

Trespa

HPL

Truciolare
Chipboard
Spanplatte
Aglomerado

Materiali abrasivi
Abrasive Materials
Schleifmaterialien
Materiales abrasivos

Laminati
Laminated
Laminate
Laminados

Legno
Wood
Holz
Madera

H3_Z2_F4

CODICE CODE	MATERIALE MATERIAL	D mm	Lu mm	Lt mm	ATTACCO - SHANK d mm l mm	Z	ROTAZ. ROTAT.	PLACCHE - TIPS n° Forante/Drilling Tip
DAF34401	ACCIAIO P.	12	23	70	12 40	2	R	8 DP
DAF34402	ACCIAIO P.	12	34	80	12 40	2	R	12 DP
DAF34403	ACCIAIO P.	14	23	70	12 50	2	R	8 DP
DAF34404	ACCIAIO	16	30	90	20 50	2	R	11 DP
DAF34405	ACCIAIO	16	35,9	95	20 50	2	R	13 DP
DAF34406	ACCIAIO	16	41,7	100	20 50	2	R	15 DP
DAF34407	ACCIAIO	20	41,7	100	20 50	2	R	15 DP
DAF34408	ACCIAIO	20	53,38	115	20 50	2	R	19 DP