



DAF 380 PLUS

FRESA CON DOPPIA ROTAZIONE Z2 Z3

Double rotation cutter Z2 Z3

Schaftfräser Z2 Z3 mit doppelte Drehung

Fresa con doble rotación Z2 Z3

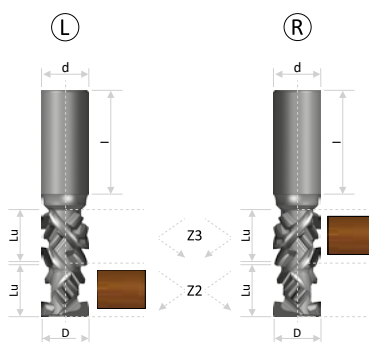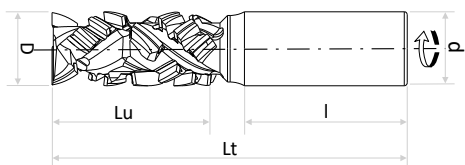

INFORMAZIONI TECNICHE TECHNICAL INFORMATION TECHNISCHE INFORMATIONEN INFORMACIONES TÉCNICAS

Riaffilabile 6-8 volte
Resharpening 6-8 times
Nachschärfbar 6-8 Male
Reafilable 6-8 veces

n° di giri RPM 18.000-20.000
No. of reps RPM 18.000-20.000
Drehzahl RPM 18.000-20.000
n° de vueltas RPM 18.000-20.000

Avanzamento 15-18 m
Feed rate 15-18 m
Vorschub 15-18 m
Velocidad de avance 15-18 m

MACCHINE MACHINES MASCHINEN MÁQUINAS

CNC

Pantografi
Pantographs
Pantographen
Pantógrafos

Macchine speciali con inserimento
ad attacco cilindrico

Special machines with cylindrical
shank

Sondermaschinen für Schaftfräser

Máquinas especiales con inserción
de mango cilíndrico

APPLICAZIONI APPLICATIONS ANWENDUNGEN APLICACIONES

Foratura
Drilling
Bohren
Taladrar

Contornatura
Contouring
Rahmenfräsen
Contornar

Scanalatura
Grooving
Nuten
Acanaladura

Ottima finitura su entrambi i lati
(sopra e sotto)

Excellent finish on both sides
(top and bottom)

Optimale Verarbeitung auf beiden

Seiten
(oben und unten)

Excelente acabado en ambos lados
(superior e inferior)

Adatto a medi e grandi lotti

Useful for medium and large batches

Geeignet für mittlere und große Partie

Perfecto para lotes medianos y grandes

MATERIALI LAVORABILI WORKPIECE MATERIALS VERARBEITBARE MATERIALIEN MATERIALES PROCESABLES

Truciolare
Chipboard
Spanplatte
Aglomerado


Materiale abrasivi
Abrasive Materials
Schleifmaterialien
Materiales abrasivos

Laminati
Laminated
Laminat
Laminados

Legno
Wood
Holz
Madera

Fresa con doppia rotazione, assiale 40° per forte avanzamento

Double rotation cutter 40° axial angle for quick feed
Doppelte Drehung Fräser 40° Achswinkel für Schnellvorschub
Fresa de doble rotación ángulo axial 40° por alta velocidad de avance



H4

CODICE CODE	D mm	Lu mm	Lt mm	ATTACCO - SHANK d mm l mm	Z	ROTAZ. ROTAT.	n°	PLACCHE - TIPS Forante/Drilling Tip
DAF380P01	25	23+23	120	25 55	3/2	R/L	20	DP
DAF380P02	25	34+34	130	25 55	3/2	R/L	30	DP
DAF380P03	25	39+39	135	25 55	3/2	R/L	35	DP
DAF380P04	25	44+44	140	25 55	3/2	R/L	40	DP