



DAF 464

FRESA ELICOIDALE Z3+3

Helical cutter Z3+3

Spiralförmig Schaftfräser Z3+3

Fresa helicoidal Z3+3

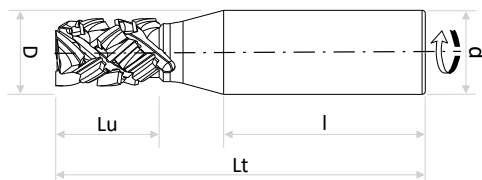


INFORMAZIONI TECNICHE TECHNICAL INFORMATION TECHNISCHE INFORMATIONEN INFORMACIONES TÉCNICAS

Riaffilabile 6-8 volte
Resharpener 6-8 times
Nachschärfbar 6-8 Male
Reafilable 6-8 veces

n° di giri RPM 18.000-20.000
No. of reps RPM 18.000-20.000
Drehzahl RPM 18.000-20.000
n° de vueltas RPM 18.000-20.000

Avanzamento 10-12 m
Feed rate 10-12 m
Vorschub 10-12 m
Velocidad de avance 10-12 m



Fresa elicoidale Z3+3 assiale 45° per forte avanzamento

Z3+3 helical cutter 45° axial angle for quick feed
Z3+3 Spiralförmigfräser mit 45° Axial für hohen Vorschub
Fresa helicoidal Z3+3 ángulo axial 45° por alta velocidad de avance

MACCHINE MACHINES MASCHINEN MÁQUINAS

CNC
Punto - Punto
Pantografi
Pantographs
Pantographen
Pantógrafos

Macchine speciali con inserimento ad attacco cilindrico
Special machines with cylindrical shank
Sondermaschinen für Schaftfräser
Máquinas especiales con inserción de mango cilíndrico

APPLICAZIONI APPLICATIONS ANWENDUNGEN APLICACIONES

Foratura
Drilling
Bohren
Taladrar

Contornatura
Contouring
Rahmenfräsen
Contornar

Scanalatura
Grooving
Nuten
Acanaladura

Ottima finitura su entrambi i lati (sopra e sotto)
Excellent finish on both sides (top and bottom)
Optimale Verarbeitung auf beiden Seiten (oben und unten)
Excelente acabado en ambos lados (superior e inferior)

Adatto a medi e grandi lotti
Useful for medium and large batches
Geeignet für mittlere und große Partie
Perfecto para lotes medianos y grandes

MATERIALI LAVORABILI WORKPIECE MATERIALS VERARBEITBARE MATERIALIEN MATERIALES PROCESABLES

Truciolare
Chipboard
Spanplatte
Aglomerado

Materiali abrasivi
Abrasive Materials
Schleifmaterialien
Materiales abrasivos

Laminati
Laminated
Laminat
Laminados

Legno
Wood
Holz
Madera

H4_Z3_F6

CODICE CODE	D mm	Lu mm	Lt mm	ATTACCO - SHANK d mm l mm	Z	ROTAZ. ROTAT.	PLACCHE - TIPS n° Forante / Drilling tip
DAF46401	20	24	85	20 50	3+3	R	12 DP
DAF46402	20	29	90	20 50	3+3	R	15 DP
DAF46403	20	34	95	20 50	3+3	R	18 DP
DAF46404	20	39	100	20 50	3+3	R	21 DP
DAF46405	20	44,5	105	20 50	3+3	R	24 DP