
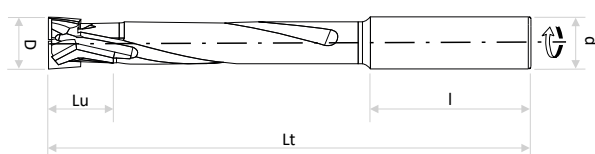


DAF 540


FRESA PER ESECUZIONE SERRATURA

Cutter for lock execution
Schaftfräser für Schlüsselloch
Fresa para realizar cerradura



Fresa con corpo in acciaio pesante per serratura ad elevate profondità

Heavy steel body cutter for deep lock slots
Fräser mit Schwermetallkörper für tiefe Schlossöffnungen
Fresa de cuerpo de acero pesado para ranuras de cerradura profundas

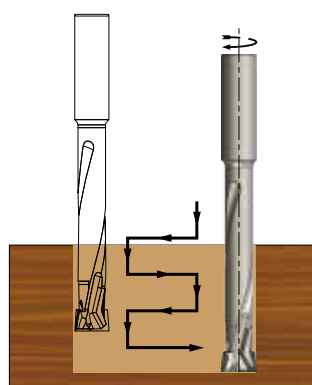


INFORMAZIONI TECNICHE TECHNICAL INFORMATION TECHNISCHE INFORMATIONEN INFORMACIONES TÉCNICAS

Riaffilabile 2-3 volte
Resharpening 2-3 times
Nachschärfbar 2-3 Male
Reafilable 2-3 veces

n° di giri RPM 18.000-20.000
No. of reps RPM 18.000-20.000
Drehzahl RPM 18.000-20.000
n° de vueltas RPM 18.000-20.000

Avanzamento 6-8 m
Feed rate 6-8 m
Vorschub 6-8 m
Velocidad de avance 6-8 m



APPLICAZIONI APPLICATIONS ANWENDUNGEN APLICACIONES

Foratura
Drilling
Bohren
Taladrar

Contornatura
Contouring
Rahmenfräsen
Contornar

Scanalatura
Grooving
Nuten
Acanaladura

Ottima finitura su entrambi i lati (sopra e sotto)
Excellent finish on both sides (top and bottom)
Optimale Verarbeitung auf beiden Seiten (oben und unten)
Excelente acabado en ambos lados (superior e inferior)

Adatto a medi e grandi lotti
Useful for medium and large batches
Geeignet für mittlere und große Partie
Perfecto para lotes medianos y grandes

MATERIALI LAVORABILI WORKPIECE MATERIALS VERARBEITBARE MATERIALIEN MATERIALES PROCESABLES

MDF

Truciolare
Chipboard
Spanplatte
Aglomerado

Materiali abrasivi
Abrasive Materials
Schleifmaterialien
Materiales abrasivos

Laminati
Laminated
Laminat
Laminados

Legno
Wood
Holz
Madera

H3_Z2_F4

CODICE CODE	MATERIALE MATERIAL	D mm	Lu mm	Lt mm	ATTACCO - SHANK d mm l mm	Z	ROT. AZ. ROTAT.	PLACCHE - TIPS n° Forante/Drilling Tip
DAF54001	ACCIAIO P.	14	20,5	150	16 50	2	R	6 DP
DAF54002	ACCIAIO P.	16	20,5	150	16 50	2	R	6 DP