




DAF 336

FRESA PER FORARE E CONTORNARE

Cutter for drilling and contouring

Schaftfräser zum bohren und schneiden

Fresa para taladrar y contornear

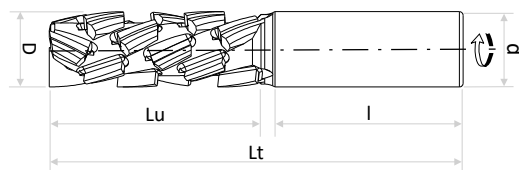

INFORMAZIONI TECNICHE TECHNICAL INFORMATION TECHNISCHE INFORMATIONEN INFORMACIONES TÉCNICAS

Riaffilabile 2-3 volte
Resharpener 2-3 times
Nachschärfbar 2-3 Male
Reafilable 2-3 veces

n° di giri RPM 18.000-20.000
No. of reps RPM 18.000-20.000
Drehzahl RPM 18.000-20.000
n° de vueltas RPM 18.000-20.000

Avanzamento 10-12 m
Feed rate 10-12 m
Vorschub 10-12 m
Velocidad de avance 10-12 m

MACCHINE MACHINES MASCHINEN MÁQUINAS

CNC

Punto - Punto

Pantografi
Pantographs
Pantographen
Pantógrafos

Macchine speciali con inserimento
ad attacco cilindrico
Special machines with cylindrical shank
Sondermaschinen für Schaftfräser
Máquinas especiales con inserción
de mango cilíndrico

APPLICAZIONI APPLICATIONS ANWENDUNGEN APLICACIONES

Foratura
Drilling
Bohren
Taladrar

Contornatura
Contouring
Rahmenfräsen
Contornar

Scanalatura
Grooving
Nuten
Acanaladura

Ottima finitura su entrambi i lati
(sopra e sotto)
Excellent finish on both sides
(top and bottom)
Optimale Verarbeitung auf beiden Seiten
(oben und unten)
Excelente acabado en ambos lados
(superior e inferior)

Adatto a medi e grandi lotti
Useful for medium and large batches
Geeignet für mittlere und große Partie
Perfecto para lotes medianos y grandes

MATERIALI LAVORABILI WORKPIECE MATERIALS VERARBEITBARE MATERIALIEN MATERIALES PROCESABLES

MDF

Truciolare
Chipboard
Spanplatte
Aglomerado

Materie abrasive
Abrasive Materials
Schleifmaterialien
Materiales abrasivos

Laminati
Laminated
Laminate
Laminados

Legno
Wood
Holz
Madera

Fresa in Z3+3 per forte avanzamento

Z3+3 milling cutter for quick feed
Z3+3-Fräser für hohen Vorschub
Fresa en Z3+3 por alta velocidad de avance

H4_Z3_F6

CODICE RH CODE	D mm	Lu mm	Lt mm	ATTACCO - SHANK d mm l mm		Z	ROTAZ. ROTAT.	PLACCHE - TIPS n° Forante/Drilling Tip
DAF33601	20	28	80	20	50	3	R	8 DP
DAF33602	20	37	90	20	50	3	R	11 DP
DAF33603	20	46	100	20	50	3	R	14 DP
DAF33604	20	55	110	20	50	3	R	17 DP
DAF33605	25	28	90	25	55	3	R	8 DP
DAF33606	25	37	100	25	55	3	R	11 DP
DAF33607	25	46	110	25	55	3	R	14 DP
DAF33608	25	55	120	25	55	3	R	17 DP
DAF33609	25	64	130	25	55	3	R	20 DP