




DAF 463

FRESA ELICOIDALE Z3+3

Helical cutter Z3+3

Spiralförmig Schaftfräser Z3+3

Fresa helicoidal Z3+3

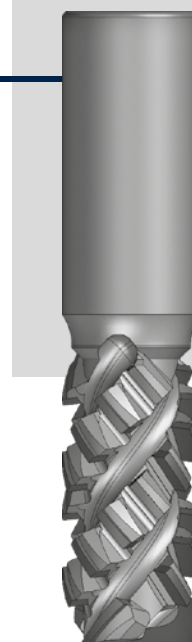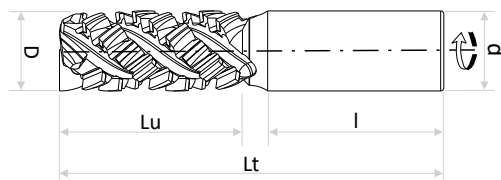


INFORMAZIONI TECNICHE TECHNICAL INFORMATION TECHNISCHE INFORMATIONEN INFORMACIONES TÉCNICAS

Riaffilabile 6-8 volte
Resharpener 6-8 times
Nachschärfbar 6-8 Male
Reafilable 6-8 veces

n° di giri RPM 18.000-20.000
No. of reps RPM 18.000-20.000
Drehzahl RPM 18.000-20.000
n° de vueltas RPM 18.000-20.000

Avanzamento 10-12 m
Feed rate 10-12 m
Vorschub 10-12 m
Velocidad de avance 10-12 m



MACCHINE MACHINES MASCHINEN MÁQUINAS

CNC

Punto - Punto

Pantografi
Pantographs
Pantographen
Pantógrafos

Macchine speciali con inserimento
ad attacco cilindrico

Special machines with cylindrical shank

Sondermaschinen für Schaftfräser

Máquinas especiales con inserción
de mango cilíndrico

APPLICAZIONI APPLICATIONS ANWENDUNGEN APLICACIONES

Foratura
Drilling
Bohren
Taladrar

Contornatura
Contouring
Rahmenfräsen
Contornar

Scanalatura
Grooving
Nuten
Acanaladura

Ottima finitura su entrambi i lati
(sopra e sotto)

Excellent finish on both sides
(top and bottom)

Optimale Verarbeitung auf beiden Seiten
(oben und unten)

Excelente acabado en ambos lados
(superior e inferior)

Adatto a medi e grandi lotti
Useful for medium and large batches
Geeignet für mittlere und große Partie
Perfecto para lotes medianos y grandes

MATERIALI LAVORABILI WORKPIECE MATERIALS VERARBEITBARE MATERIALIEN MATERIALES PROCESABLES

Truciolare
Chipboard
Spanplatte
Aglomerado

Materie abrasivi
Abrasive Materials
Schleifmaterialien
Materiales abrasivos

Laminati
Laminated
Laminat
Laminados

Legno
Wood
Holz
Madera

Fresa elicoidale Z3+3 assiale 45° per forte avanzamento

Z3+3 helical cutter 45° axial angle for quick feed
Z3+3 Spiralförmigfräser mit 45° Axial für hohen Vorschub
Fresa helicoidal Z3+3 ángulo axial 45° por alta velocidad de avance

H4_Z3_F6

CODICE CODE	D mm	Lu mm	Lt mm	ATTACCO - SHANK d mm l mm	Z	ROTAZ. ROTAT.	PLACCHE - TIPS n° Forante/Drilling Tip
DAF46301	25	24	90	25 55	3+3	R	11 DP
DAF46302	25	29	95	25 55	3+3	R	14 DP
DAF46303	25	34	100	25 55	3+3	R	17 DP
DAF46304	25	39	105	25 55	3+3	R	20 DP
DAF46305	25	44,5	110	25 55	3+3	R	23 DP
DAF46306	25	49	115	25 55	3+3	R	26 DP
DAF46307	25	54	120	25 55	3+3	R	29 DP
DAF46308	25	59	125	25 55	3+3	R	32 DP